

Lecture-8

Haralick's Edge Detector

Haralick's Edge Detector

- Fit a bi-quadratic polynomial to a small neighborhood of a pixel.
- Compute analytically second and third directional derivatives in the direction of gradient.
- If the second derivative is equal to zero, and the third derivative is negative, then that point is an edge point.

Haralick's Edge Detector

Bi-cubic polynomial:

$$f(x, y) = k_1 + k_2x + k_3y + k_4x^2 + k_5xy + k_6y^2 + k_7x^3 + k_8x^2y + k_9xy^2 + k_{10}y^3.$$

Gradient angle, defined with positive y-axis:

$$\sin \theta = \frac{k_2}{\sqrt{k_2^2 + k_3^2}},$$

$$\cos \theta = \frac{k_3}{\sqrt{k_2^2 + k_3^2}}.$$

Homework

Directional derivative $f'_\theta = \frac{\partial f}{\partial x} \cos \theta + \frac{\partial f}{\partial y} \sin \theta.$

Gradient angle, defined with positive x-axis:

Haralick's Edge Detector

$$f'_\theta = \frac{\partial f}{\partial x} \cos \theta + \frac{\partial f}{\partial y} \sin \theta.$$

$$\left. \begin{aligned} f''_\theta(x, y) &= \frac{\partial^2 f}{\partial x^2} \sin^2 \theta + \frac{\partial^2 f}{\partial y^2} \cos^2 \theta + 2 \frac{\partial^2 f}{\partial x \partial y} \cos \theta \sin \theta, \\ f''_\theta(x, y) &= \frac{\partial^2 f}{\partial x^2} \sin^2 \theta + \frac{\partial^2 f}{\partial y^2} \cos^2 \theta + 2 \frac{\partial^2 f}{\partial x \partial y} \cos \theta \sin \theta. \end{aligned} \right\}$$

Haralick's Edge Detector

$$f(x, y) = k_1 + k_2x + k_3y + k_4x^2 + k_5xy + k_6y^2 + k_7x^3 + k_8x^2y + k_9xy^2 + k_{10}y^3.$$

$$x = \rho \sin \theta, \quad y = \rho \cos \theta$$

$$f_\theta(\rho) = C_0 + C_1\rho + C_2\rho^2 + C_3\rho^3, \quad \text{Homework}$$

$$C_0 = k_1,$$

$$C_1 = k_2 \sin \theta + k_3 \cos \theta,$$

$$C_2 = k_4 \sin^2 \theta + k_5 \sin \theta \cos \theta + k_6 \cos^2 \theta,$$

$$C_3 = k_7 \sin^3 \theta + k_8 \sin^2 \theta \cos \theta + k_9 \sin \theta \cos^2 \theta + k_{10} \cos^3 \theta.$$

Haralick's Edge Detector

$$f_\theta(\rho) = C_0 + C_1\rho + C_2\rho^2 + C_3\rho^3,$$

$$f'_\theta(\rho) = C_1 + 2C_2\rho + 3C_3\rho^2,$$

$$f''_\theta(\rho) = 2C_2 + 6C_3\rho,$$

$$f'''_\theta(\rho) = 6C_3.$$

$$f'''_\theta(\rho) < 0, \text{ we get } 6C_3 < 0, \text{ or } C_3 < 0.$$

$$f''_\theta(\rho) = 2C_2 + 6C_3\rho = 0, \text{ we get } \left| \frac{C_2}{3C_3} \right| < \rho_0.$$

Haralick's Edge Detector

First order polynomial $f(x, y) = k_1 + k_2x + k_3y.$

9 points give 9 eqs

$$\begin{aligned} f1 &= k_1 + k_2x_1 + k_3y_1, \\ f2 &= k_1 + k_2x_2 + k_3y_2, \\ &\vdots \\ f9 &= k_1 + k_2x_9 + k_3y_9. \end{aligned}$$

$$\begin{bmatrix} f1 \\ f2 \\ \vdots \\ f9 \end{bmatrix} = \begin{bmatrix} 1 & x_1 & y_1 \\ 1 & x_2 & y_2 \\ \vdots & \vdots & \vdots \\ 1 & x_9 & y_9 \end{bmatrix} \begin{bmatrix} k_1 \\ k_2 \\ k_3 \end{bmatrix},$$

$$f = Ak.$$

$$\begin{aligned} (A^T A)^{-1} A^T f &= k, \\ Bf &= k. \end{aligned}$$

Haralick's Edge Detector

$B = (A^T A)^{-1} A^T$ is a 3×9 matrix



$$Bf = k.$$

$$\begin{bmatrix} b_{11} & b_{12} & b_{13} & b_{14} & b_{15} & b_{16} & b_{17} & b_{18} & b_{19} \\ b_{21} & b_{22} & b_{23} & b_{24} & b_{25} & b_{26} & b_{27} & b_{28} & b_{29} \\ b_{31} & b_{32} & b_{33} & b_{34} & b_{35} & b_{36} & b_{37} & b_{38} & b_{39} \end{bmatrix} \begin{bmatrix} f1 \\ f2 \\ f3 \\ f4 \\ f5 \\ f6 \\ f7 \\ f8 \\ f9 \end{bmatrix} = \begin{bmatrix} k1 \\ k2 \\ k3 \end{bmatrix}$$

$$k_1 = b_{11}f1 + b_{12}f2 + b_{13}f3 + b_{14}f4 + b_{15}f5 + b_{16}f6 + b_{17}f7 + b_{18}f8 + b_{19}f9$$

$$k_1 = f * b_1.$$

Computing coefficients using convolution

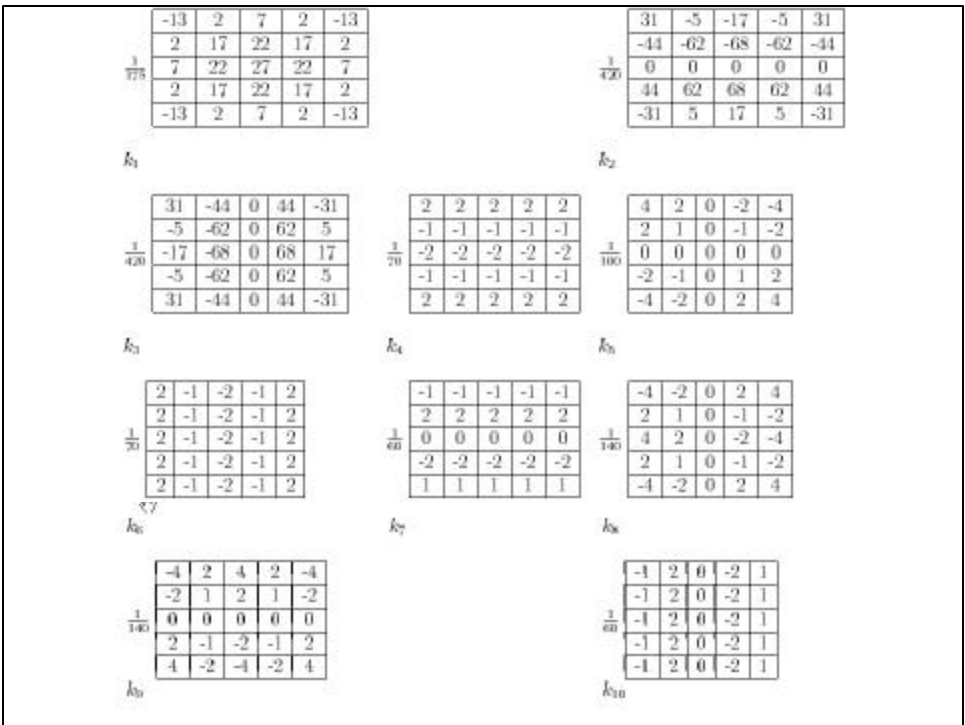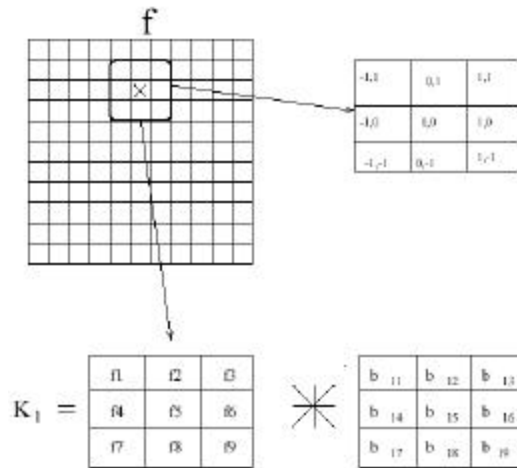

Haralick's Edge Detector

1. Find $k_1, k_2, k_3, \dots, k_{10}$ using least square fit, or masks given in Figure 2.8.
2. Compute $\theta, \sin \theta, \cos \theta$.
3. Compute C_2, C_3 .
4. If $C_3 < 0$ and $|\frac{C_2}{3C_3}| < \rho_0$ then that point is an edge point.

Figure 2.9: The steps in Haralick's Edge Detector.

Comparison of Three Edge Detectors

- Marr-Hildreth
 - Gaussian filter
 - Zerocrossings in Laplacian
- Canny
 - Gaussian filter
 - Maxima in gradient magnitude
- Haralick
 - Smoothing through bi-cubic polynomial
 - Zerocrossings in the second directional derivative, and negative third derivative

Laplacian and the second Directional Derivative and the direction of Gradient

$$\Delta^2 f = f_{xx} + f_{yy} = f_q'' + f_n''$$

$$\Delta^2 f = f_{xx} + f_{yy} = f_q'' + f_n''$$

$$f_q' = f_x \cos q + f_y \sin q$$

$$f_q'' = (f_{xx} \cos q + f_{yx} \sin q) \cos q + (f_{xy} \cos q + f_{yy} \sin q) \sin q$$

$$f_q'' = f_{xx} + f_{yy} + 2f_{xy} \cos q \sin q$$

$$f_n'' = f_{xx} + f_{yy} + 2f_{xy} \cos n \sin n$$

$$f_n'' = f_{xx} + f_{yy} + 2f_{xy} \cos(q + 90) \sin(q + 90)$$

$$f_n'' = f_{xx} + f_{yy} - 2f_{xy} \cos q \sin q$$

Laplacian and the second Directional Derivative and the direction of Gradient

$$f_q'' = f_{xx} + f_{yy} + 2f_{xy} \cos q \sin q$$

$$f_n'' = f_{xx} + f_{yy} - 2f_{xy} \cos q \sin q$$

$$\Delta^2 f = f_{xx} + f_{yy} = f_q'' + f_n''$$

Scales

- What should be value for Canny and LG edge detection?
 - Marr-Hildreth:
- If use multiple values (scales), how do you combine multiple edge maps?
 - *Spatial Coincidence* assumption:
 - Zerocrossings that coincide over several scales are physically significant.

Scale Space

- Apply whole spectrum of scales
- Plot zerocrossings vs scales in a scale-space
- Interpret scale space contours
 - Contours are arches, open at the bottom, closed at the top
 - Interval tree
 - Each interval I corresponds to a node in a tree, whose parent node represents larger interval, from which interval I emerged, and whose off springs represents smaller intervals into which I subdivides.
 - Stability of a node is a scale range over which the interval exists.


Scale Space

- Top level description
 - Iteratively remove nodes from the tree, splicing out nodes that are less stable than any of their parents and off springs

Scale Space




Multiple smooth versions of a signal



Zerocrossings at multiple scale

Scale Space

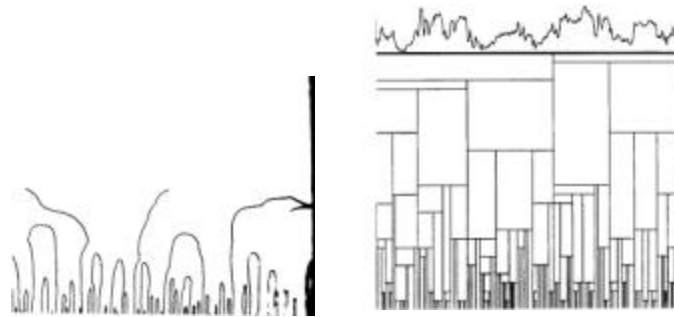

Scale Space

Interval Tree

Scale Space

A top level description of several signals using stability criterion.

